



**ANNOVI
REVERBERI**®
The Power of Experience

EIMA INTERNATIONAL 2024

 **FEDER
UNACOMA**
Federazione Nazionale Costruttori
Macchine per l'Agricoltura



**INDUSTRIAL
DIVISION** *NEWS*

POMPA ALBERO MASCHIO

Premium Series

LOW MAINTENANCE
HIGH EFFICIENCY

**cantieri ed
edilizia**
*construction
industry*

CAR WASH

Piedi a richiesta.
Base on request.

N version

MOD	 MAX	 MAX		 KG NET				
	l/min	gpm	bar	psi	hp	kW	N° giri/1'	kg
JK 1450rpm Nversion Ø24mm								
JK GREEN OIL	15	3,96	200	2900	7,5	5,5	1450	10

**testa
nichelata**
*nickel plated
brass head*

**bielle in
bronzo**
*bronze
connecting-rods*

NEW

322 series

POMPA ALBERO MASCHIO Solid shaft pump



idropultrici
pressure
washers



processi
industriali
industrial
processes






autolavaggio
car wash



agricoltura
agriculture



cantieri ed
edilizia
construction
industry

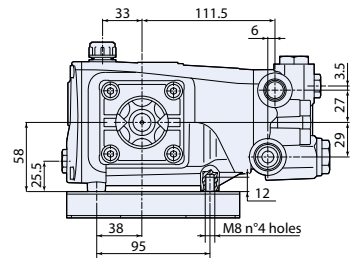


Piedi a richiesta.
Base on request.



Regulating valve
version



● Model H



N version

Flangiatura compatibile XT N.
XT N flange type.

MOD	COD								
		l/min	gpm	bar	psi	hp	kW	N° giri/1'	kg
RR 1450rpm Nversion Ø24mm									
RR 13.20 N	23771	13	3,43	200	2900	7,5	5,5	1450	7,6
RR 15.15 N	23772	15	3,96	150	2200	5,5	4	1450	7,6
RR 15.20 N	23507	15	3,96	200	2900	7,5	5,5	1450	7,6
● RR 15.25 H N	● 24934	15	3,96	250	3625	10	7,5	1450	8
RR 18.12 N	23773	18	4,75	120	1740	5,5	4	1450	7,6
RR 18.16 N	23774	18	4,75	160	2300	7,5	5,5	1450	7,6
RR 20.20 N	● 29836	20	5,3	200	2900	9,5	7	1450	8
RR 21.20 N	● 29835	21	5,5	200	2900	10	7,5	1450	8
RR 22.20 N	● 29759	22	5,8	200	2900	11	8	1450	8
RRA 1750rpm Nversion Ø24mm									
RRA 3.5G25 N	23779	13,2	3,5	170	2500	6	4,5	1750	7,6
RRA 4G30 N	23780	15,1	4	205	3000	8,2	5,5	1750	7,6
● RRA 4G36 H N	● 24937	15,1	4	250	3600	8,6	6,4	1750	8
RRA 5.5G30 N	23781	20,8	5,5	205	3000	11	8,2	1750	7,6



● testa
nichelata
nickel plated
brass head



● bielle in
bronzo
bronze
connecting-rods



NEW



testa in
ottone
brass
head



bielle in
alluminio
aluminium
connecting-rods

3228500

538 Series

POMPA ALBERO MASCHIO Solid shaft pump



**lavaggio
industriale**
industrial
cleaning



**processi
industriali**
industrial
processes



autolavaggio
car wash



produzione
manufacturing



agricoltura
agriculture



municipality





misting



**pulizia
tubazioni**
sewer
jetting



antincendio
fire fighting

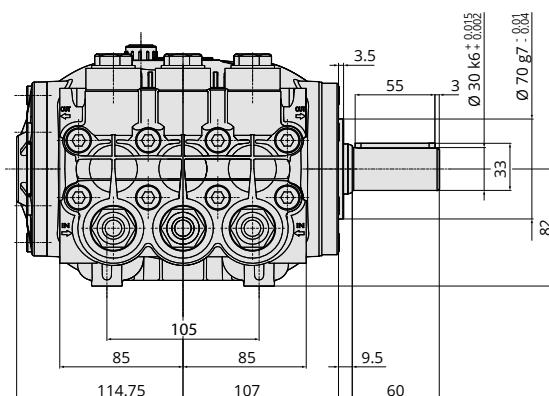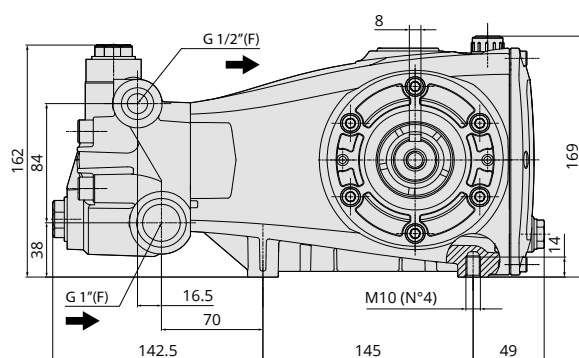

5388500

N version

MOD	COD	 MAX	 MAX		 KG NET				
		l/min	gpm	bar	psi	hp	kW	N° giri/1'	kg
RF 1450rpm Nversion Ø30mm									
RF 22.400 N DX	29514	22	5.8	400	5800	22	16.5	1450	22
RF 27.400 N DX	29513	27	7.1	400	5800	27	20	1450	22
RF 36.400 N DX	29148	36	9.5	400	5800	36.2	27	1450	22
RF 39.400 N DX	29512	39	10.3	400	5800	39	29	1450	22
RFA 1750rpm Nversion Ø30mm									
RFA 7G50 N DX	29968	26.5	7	350	5000	23	17	1750	22
RFA 8G50 N DX	29969	30	8	350	5000	27	20	1750	22
RFA 10.7G50 N DX	29970	40	10.7	350	5000	36.2	27	1750	22



**testa in
ottone**
brass
head



**bielle in
bronzo**
bronze
connecting-rods

366 Series

POMPA ALBERO MASCHIO Solid shaft pump



**lavaggio
industriale**
industrial
cleaning



**processi
industriali**
industrial
processes



municipality





**pulizia
tubazioni**
sewer
jetting



**cantieri ed
edilizia**
construction
industry



**settore
navale**
marine
industry

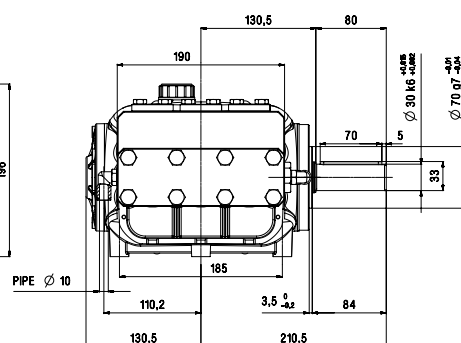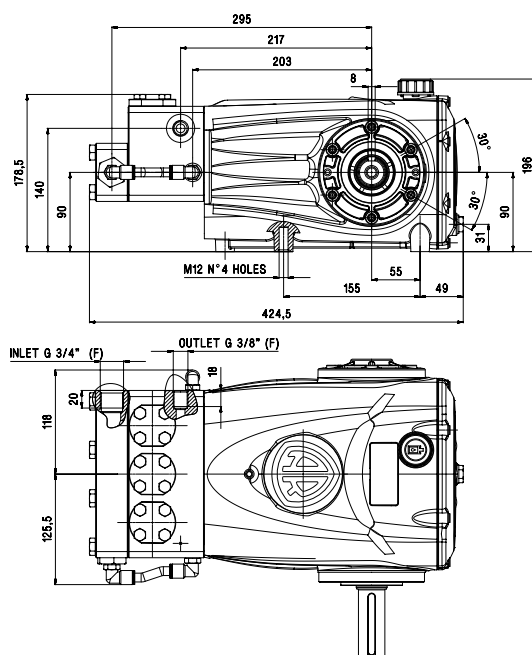

N version

MOD	COD	 MAX	 MAX		 NET				
		l/min	gpm	bar	psi	hp	kW	N° giri/1'	kg
RTX-I 1450rpm Nversion Ø30mm									
RTX-I 24.800 N	28954	24	6.34	800	11600	48	36	1450	34

NEW



**testa in
acciaio inox**
inox pump
head



**bielle in
bronzo**
bronze
connecting-rods

418 Series

POMPA ALBERO MASCHIO Solid shaft pump





**lavaggio
industriale**
industrial
cleaning



municipality



**pulizia
tubazioni**
sewer
jetting

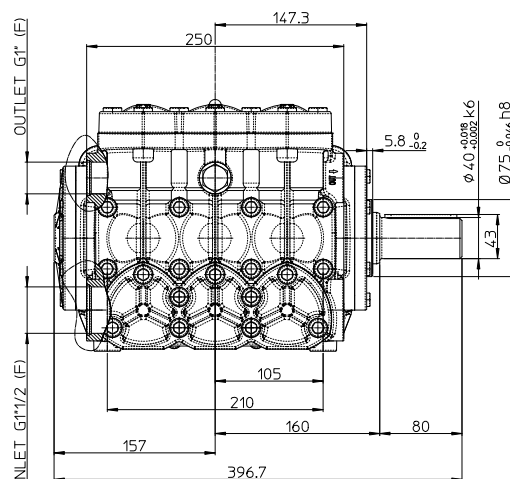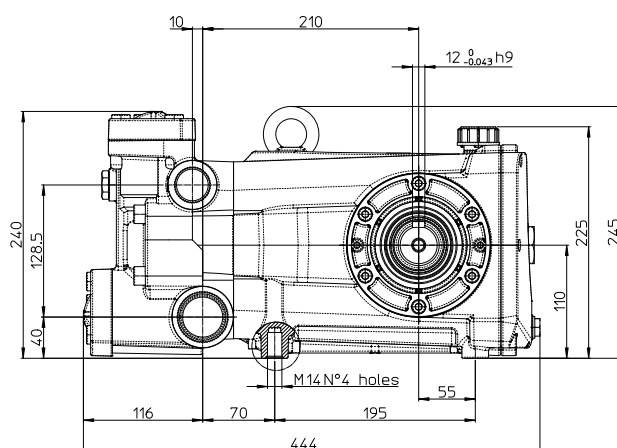

N version

MOD	COD	 MAX	 MAX		 KG NET				
		l/min	gpm	bar	psi	hp	kW	N° giri/1'	kg
RTD-J 1000rpm N version Ø40mm									
RTD-J 80.350 H N	29807	80	21.1	350	5100	75	55	1000	63.8
RTD-J 130.220 H N	29714	130	34.3	220	3200	75	55	1000	59.0
RTD-J 160.180 H N	29715	160	42.3	180	2600	75	55	1000	59.0
RTD-J 210.150 H N	29716	210	55	150	2200	80	60	1000	59.0
RTD-J 1150rpm N version Ø40mm									
RTD-J 240.140H N	29717	240	63.4	140	2000	86	64	1150	59.0



**testa
nichelata**
nickel plated
brass head



**bielle in
bronzo**
bronze
connecting-rods

Stainless Steel



POMPA ALBERO MASCHIO Solid shaft pump



industria
alimentare
food
industry



settore
navale
marine
industry

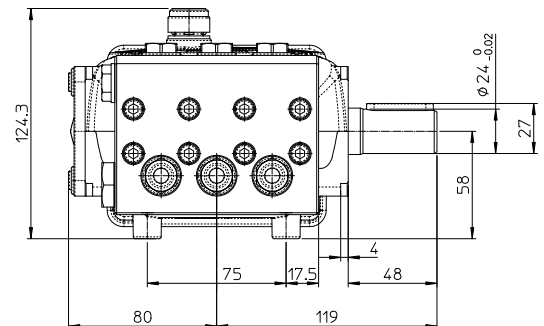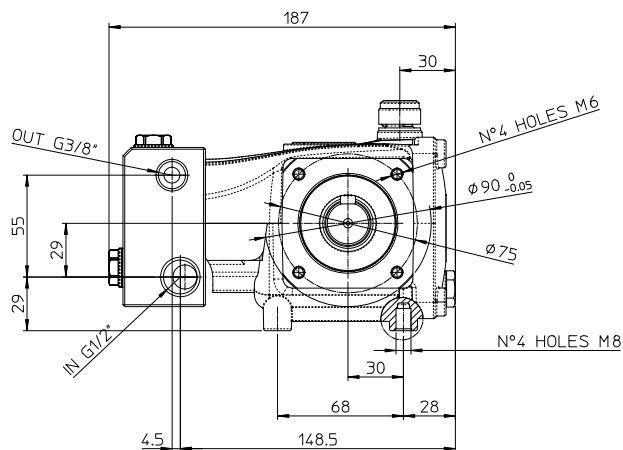

N version

MOD	COD	 MAX	 MAX						
		l/min	gpm	bar	psi	hp	kW	N° giri/1'	kg
RC-SS Nversion Ø24mm									
RC-SS 9.15 N	29471	9	2,40	150	2200	3,5	3	1450	7
RC-SS 11.15 N	29472	11	2,90	150	2200	4,4	3,3	1450	7
RC-SS 13.15 N	29473	13	3,60	150	2200	4,8	3,6	1450	7
RC-SS 14.15 N	29474	14	3,70	150	2200	5,1	3,9	1450	7



testa in AISI
316L
AISI 316L
pump head



bielle in
bronzo
bronze
connecting-rods



O-Ring in
Viton
Viton
O-Rings





NEW

Additional Electric Motor

ELECTRIC MOTOR-PUMP UNITS



idropulitrici
pressure
washers

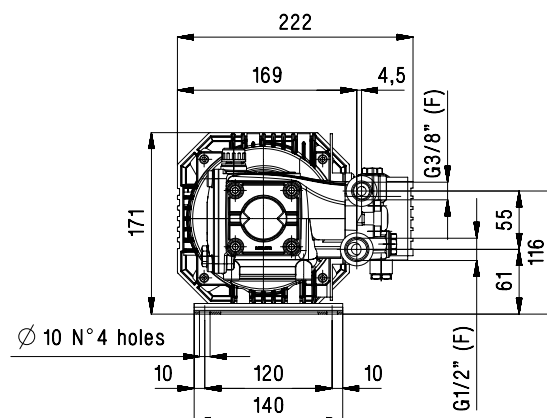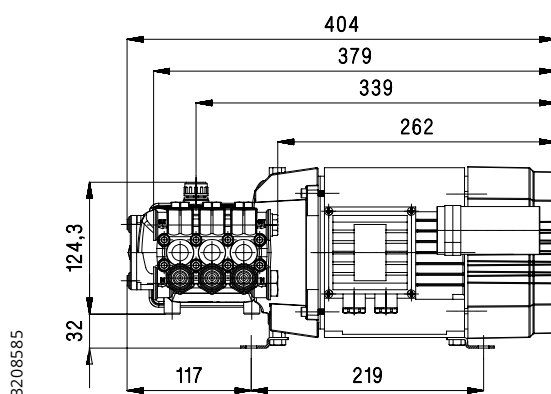

Valvole di regolazione a richiesta.
Regulating valve on request.
Manometro fornito a richiesta.
Pressure gauge on request.

MOD	COD.	 MAX	 MAX								 KG NET
	3 ~	l/min	gpm	bar	psi	hp	kW	N° giri/1'	V 1-50Hz	V 3-50Hz	kg
HRC 1450rpm											
HRC 8.14 ET	28601	8	2,11	140	2000	3	2,2	1450	-	230/400	22,5
HRC 9.14 ET	28604	9	2,37	140	2000	3	2,2	1450	-	230/400	22,5



testa in
ottone
brass
head



bielle in
alluminio
aluminium
connecting-rods



frequenza
motore
motor
frequency





NEW

Additional Electric Motor

ELECTRIC MOTOR-PUMP UNITS



idropulitrici
pressure
washers

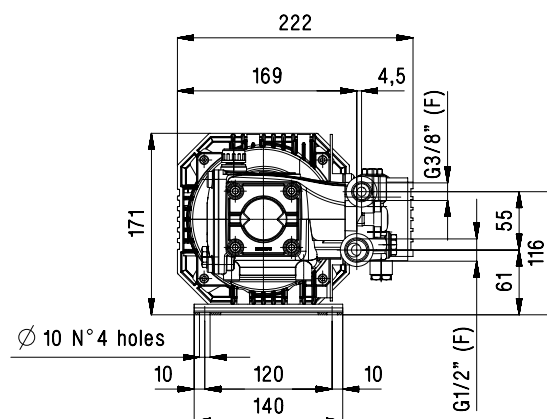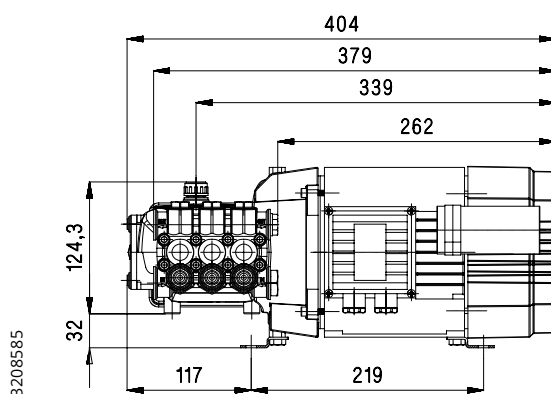

Valvole di regolazione a richiesta.
Regulating valve on request.
Manometro fornito a richiesta.
Pressure gauge on request.

MOD	COD	 MAX	 MAX						 NET	
	1 ~	l/min	gpm	bar	psi	hp	kW	N° giri/1'	V ~60Hz	kg
HRCA 1750rpm										
HRCA 2G18 EM	70023	8	2,11	120	1740	2,5	1,8	1750	230	21,5



testa in
ottone
brass
head



bielle in
alluminio
aluminium
connecting-rods




1~60Hz
frequenza
motore
motor
frequency

Additional Electric Motor

ELECTRIC MOTOR-PUMP UNITS



misting

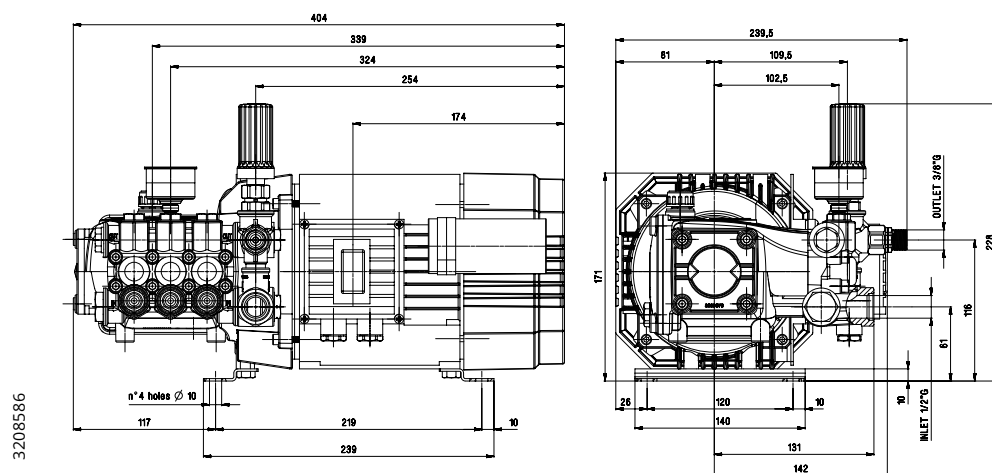

MOD	COD	 MAX	 MAX								 KG NET
	1 ~	l/min	gpm	bar	psi	hp	kW	N° giri/1'	V 1-50Hz	kg	
HRC-M 1450rpm											
HRC-M 02.08 EM	70012	2	0,52	80	1145	0,5	0,35	1450	230	22	
HRC-M 04.08 EM	70014	4	1,06	80	1145	1	0,7	1450	230	22	
HRC-M 06.08 EM	70016	6	1,58	80	1145	1	0,7	1450	230	22	
HRC-M 08.08 EM	70018	8	2,11	80	1145	1,8	1,35	1450	230	22	
HRC-M 11.07 EM	70020	11	2,90	70	1015	2,2	1,65	1450	230	22	
HRC-M 13.06 EM	70022	13	3,43	60	870	2,2	1,65	1450	230	22	



testa in
ottone
brass
head



bielle in
alluminio
aluminium
connecting-rods



1~50Hz
frequenza
motore
motor
frequency

Accessori

accessories

RIDUTTORI

Gear Boxes



CR 3/4"

Riduttore 1:2 per motori a scoppio/diesel con albero cilindrico 3/4" (19,05 mm) e flangia SAE J609a.

1:2 reduction gear box for gas/diesel engines with 3/4" cylindrical shaft and SAE J609a flange.

XT series

COD.1694

XM, RK series

COD.1692

Riduttore 1:2,24 per motori a scoppio/diesel con albero cilindrico 3/4" (19,05 mm) e flangia SAE J609a.

1:2,24 reduction gear box for gas/diesel engines with 3/4" cylindrical shaft and SAE J609a flange.

XM, RK series

COD.1691



CR 1"

Riduttore 1:2 per motori a scoppio/diesel con albero cilindrico 1" (25,4 mm) e flangia SAE J609a.

1:2 reduction gear box for gas/diesel engines with 1" cylindrical shaft and SAE J609a flange.

XT series

COD.1693

XM, RK series

COD.1690

RG, RW, XW, SXW series

COD.1697

Riduttore 1:2,24 per motori a scoppio/diesel con albero cilindrico 1" (25,4 mm) e flangia SAE J609a.

1:2,24 reduction gear box for gas/diesel engines with 1" cylindrical shaft and SAE J609a flange.

XM, RK series

COD.1689

RG, RW, XW, SXW series

COD.1698



CR 1"1/8

Riduttore 1:2 per motori a scoppio/diesel con albero cilindrico 1" 1/8 (28,6 mm) e flangia SAE J609a.

1:2 reduction gear box for gas/diesel engines with 1" 1/8 cylindrical shaft and SAE J609a flange.

RG, RW, XW, SXW series

COD.1670



WG31

Utilizzabile con motori fino a 31HP.
For motors up to 31HP.

NEW

Riduttore 1:2.2 a denti elicoidali per motori a scoppio/diesel con albero cilindrico 1" 1/8 (28,6 mm) e flangia SAE J609 fl.B - C.

1:1.2.2 reduction gear box with helical teeth for gas/diesel engines with 1" 1/8 cylindrical shaft and SAE J609 B - C flanges.

RG, RW, XW, SXW series

COD.29593

Riduttore 1:2 a denti elicoidali per motori a scoppio/diesel con albero cilindrico 1" 1/8 (28,6 mm) e flangia SAE J609 fl.B - C.

1:1.2 reduction gear box with helical teeth for gas/diesel engines with 1" 1/8 cylindrical shaft and SAE J609 B - C flanges.

RG, RW, XW, SXW series

COD.29594



WG40

Utilizzabile con motori fino a 40HP.
For motors up to 40HP.

NEW

Riduttore 1:2.25 a denti elicoidali per motori a scoppio/diesel on albero cilindrico 1" 1/8 (28,6 mm) e flangia SAE J609c.

1:1.2.25 reduction gear box with helical teeth for gas/diesel engines fwith 1" 1/8 cylindrical shaft and SAE J609c flange.

RTX, RF series

Motori HONDA/B&S / HONDA/B&S engines

COD.29403

RTX, RF series

Motori KOHLER / KOHLER engines

COD.29874

Riduttore 1:2.25 a denti elicoidali per motori a scoppio/diesel on albero cilindrico 1" 7/16 (36,5 mm).

1:1.2.25 reduction gear box with helical teeth for gas/diesel engines fwith 1" 7/16 cylindrical shaft.

RTX, RF series

Motori HONDA/B&S / HONDA/B&S engines

COD.29923

RTX, RF series

Motori KOHLER / KOHLER engines

COD.29924



WG75

Utilizzabile con motori fino a 75HP.
For motors up to 75HP

NEW

Riduttore 1:1.5 a denti elicoidali per motori a scoppio/diesel con albero maschio Ø40.

1:1.5 reduction gear box with helical teeth for gas/diesel engines with Ø40 male shaft.

RTD series

COD.28687

Riduttore 1:1.86 a denti elicoidali per motori a scoppio/diesel con albero maschio Ø40.

1:1.86 reduction gear box with helical teeth for gas/diesel engines with Ø40 male shaft.

RTD series

COD.28688

Riduttore 1:2.22 a denti elicoidali per motori a scoppio/diesel con albero maschio Ø40.

1:2.22 reduction gear box with helical teeth for gas/diesel engines with Ø40 male shaft.

RTD series

COD.28689



**ANNOVI
REVERBERI**®
The Power of Experience

Seguici su / Follow us on



Annovi Reverberi spa

Via Martin Luther King 3
41122 Modena (Italy)
Tel. +39 059 414 411
Fax +39 059 253 505
infoar@annovireverberi.it
www.annovireverberi.it

AR North America Inc.

140 - 81st Avenue Northeast
Fridley, MN USA 55432
Ph. +1 763 398 2008
Fax +1 763 398 2009
info@arnorthamerica.com
www.arnorthamerica.com

AR China Distribution Co., Ltd

2nd Floor, Build. 1, No. 651 Jiangting Rd.
Jinhui Town, Fengxian District, Shanghai
201404 China
Ph./Fax. +86 21 54846800 ext 815
info@ar-china.cn
www.ar-china.cn

AR Latin America

Rua Jandaia do Sul 125, Pinhais
Curitiba, Brasil, CEP 83324-440
Ph. +55 41 3059-2748
info@arlatam.com.br
www.annovireverberi.com.br
www.arlatam.com.br